

Flowchart showing procedures for drainage connection works carried out by owner/developer

Developer submits application

Developer submits HBP1 to DSD with cheque payment

DSD conducts inspection within 14 days from receipt of application

DSD conducts handing over inspection and AP provides records of material quality, acceptance tests, colour closed circuit television survey report and as-built drawings for DSD's scrutiny

DSD issues the satisfaction letter

DSD takes over for maintenance if the works found to be satisfactory


Remarks to Developer for making drainage connection works:

- (a) AP shall seek comments from utility companies (UU), Transport Department, Traffic Police, other government department; etc.
- (b) AP shall prepare the coordinated programme of utility works; submit to HyD the coordinated programme of utility works and UU's no adverse comments response.
- (c) Developer / contractor shall apply for an XP from HyD/LandsD according to para. 1.1 and 1.2 of the Practitioner's Guidelines.
- (d) For amendments of drainage connection works outside the lot, AP should submit the proposed details to DSD for approval. Minor amendments can be agreed with DSD staff on site.


AP to carry out remedial works within a 12-month defects liability period if required

In this Annex, the term Developer means the owner/developer or the Authorized Person on his behalf where appropriate.

**Flowchart showing procedures for run-in construction and
damaged footway reconstruction works
carried out by private developers
in conjunction with building development**

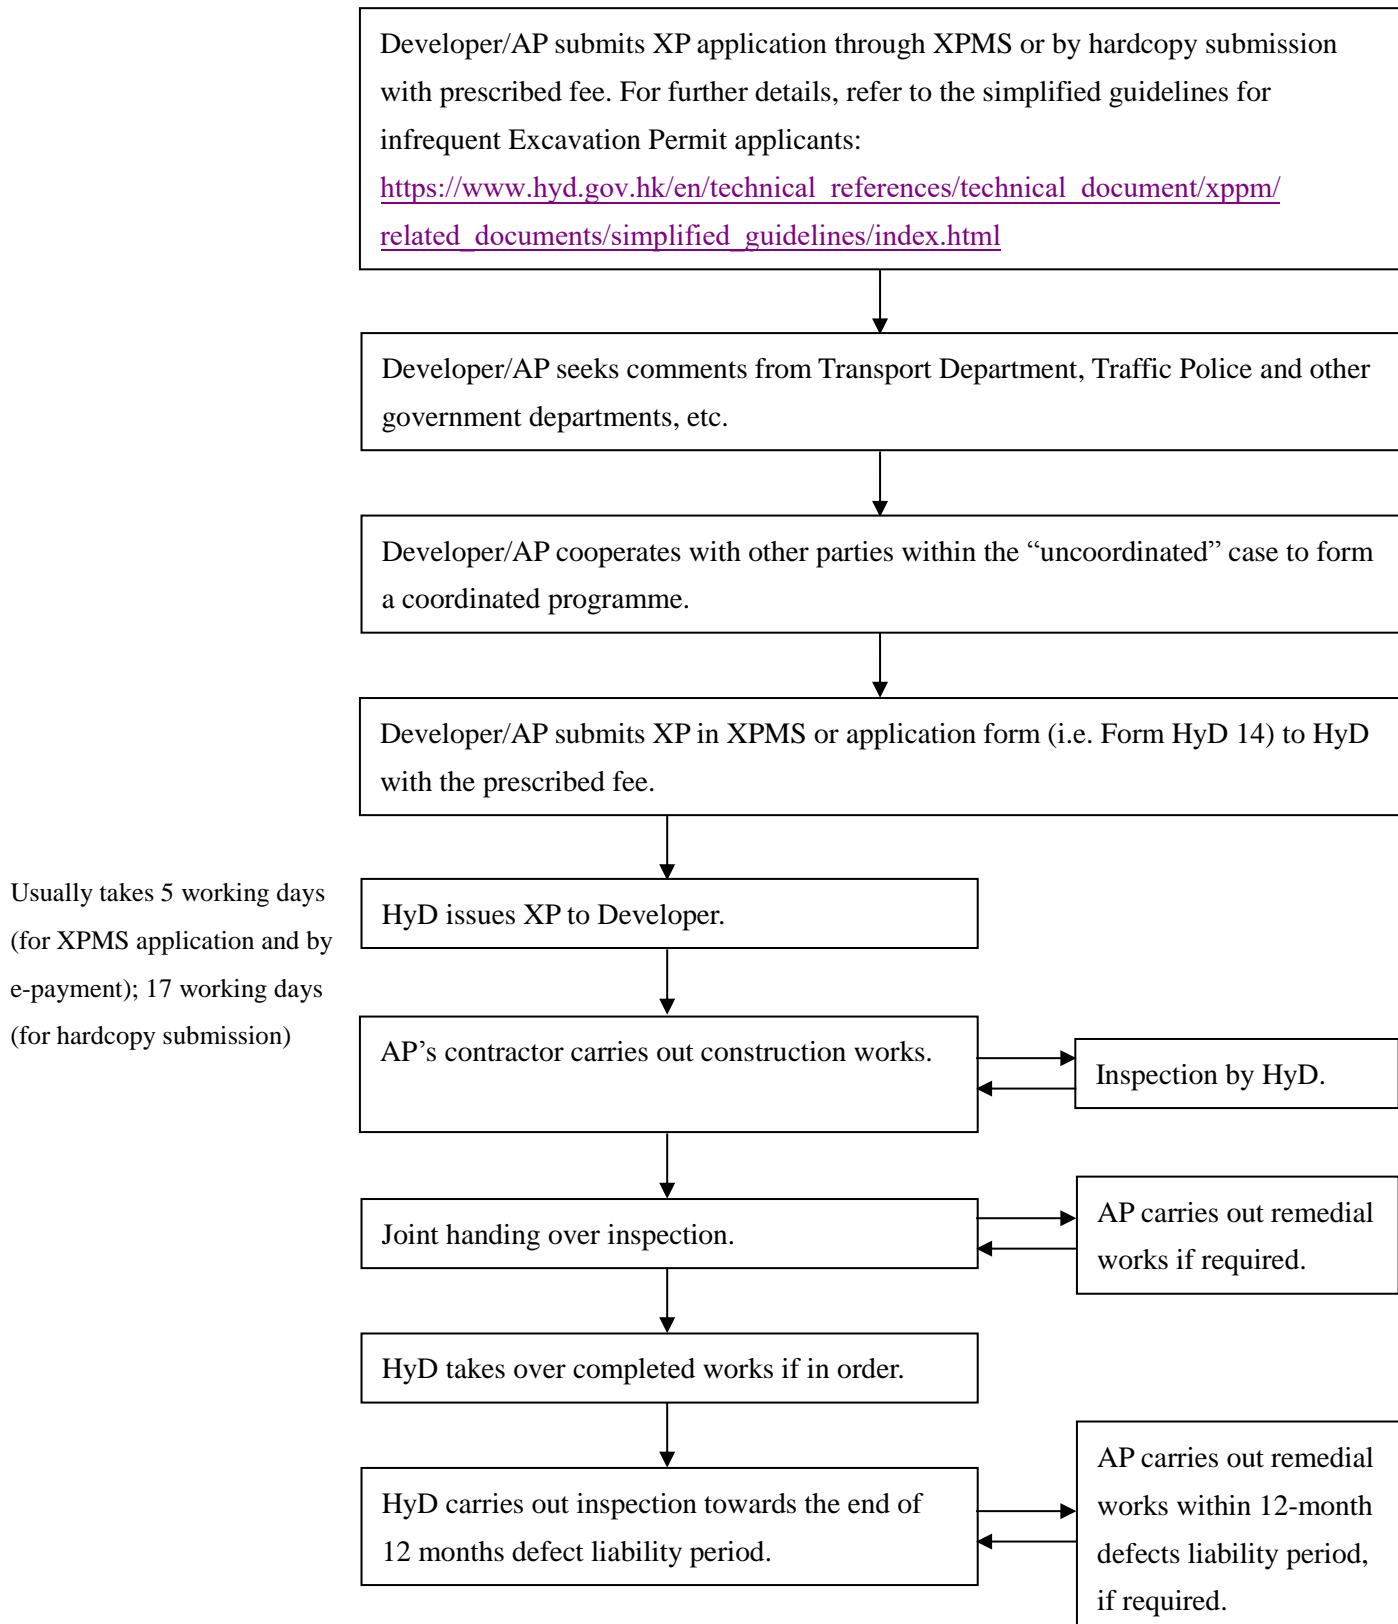

**Flowchart showing procedures
for water supply connection works carried out by private developers
in conjunction with building development**

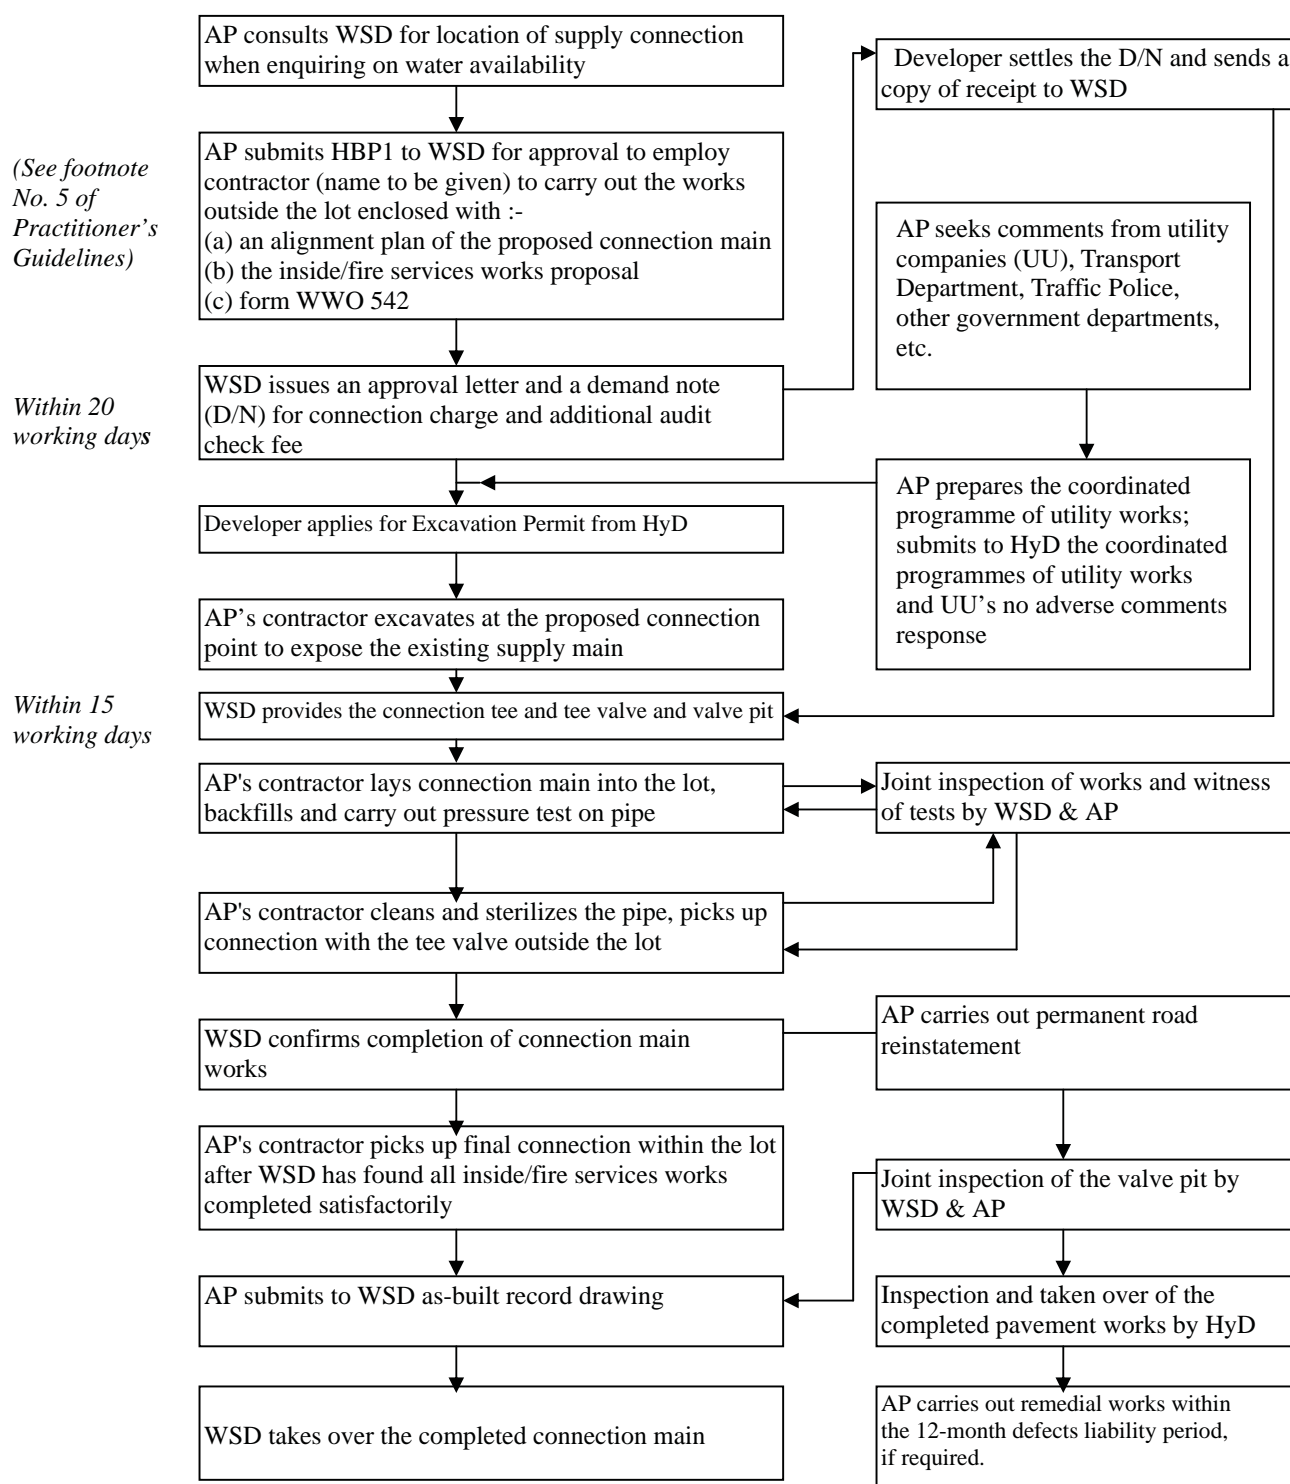

In this Annex, the term Developer means the owner/developer or the Authorized Person on his behalf where appropriate.